

Industrial

LIGHTING

LED High Bay **MW - CYC**



Circle Lens (90°)



Tempered Glass (120°)




MW - CYC


Product Specification

Power	: 90 W
Luminous Flux	: 13.500 LM
Luminous Efficiency	: 150 LM/W
CCT	: 5000 K
CRI	: > 80Ra
Input Voltage	: AC 90 - 305 V
Power Factor	: > 0.98
Total Harmonic Distortion	: < 15%
Life Time	: 50.000 Hrs
Beam Angle	: 90° / 120°
IP Grade	: IP 65
Housing Material	: Die - Cast Aluminum ADC - 12

Light Distribution Curve

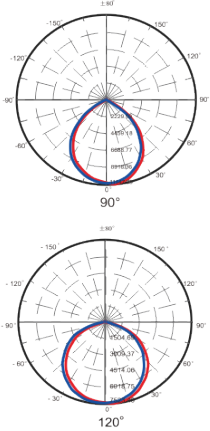

Dimension (mm)

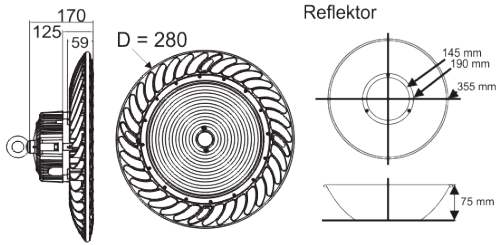

MW - CYC + REF




Tempered Glass + Ref



Circle Lens + Ref

LED High Bay **ZH - SQR**




Plain Lens (120°)


Product Specification

Power	: 100 W
Luminous Flux	: 15.000 LM
Luminous Efficiency	: 150 LM/W
CCT	: 5000 K
CRI	: > 80Ra
Input Voltage	: AC 100 - 277 V
Power Factor	: > 0.95
Total Harmonic Distortion	: < 10%
Life Time	: 50.000 Hrs
Beam Angle	: 90° / 120°
IP Grade	: IP 65
Housing Material	: Die - Cast Aluminum ADC - 12

Light Distribution Curve

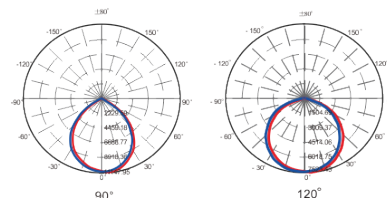

Dimension (mm)

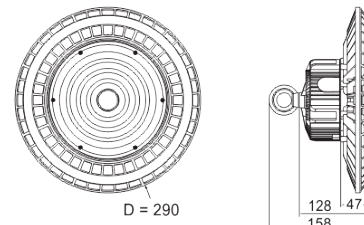

LED High Bay *Fortimo G2*

Product Specification



Lamp : Fortimo High Bay G2
 Housing : Die-Casting Aluminium
 Finishing : Powder Coating
 Colour : Black
 Ingress Protection : IP 65
 Cover : Tempered glass with protective film
 Using Reflector



Equipment

Type	Light Output	System Wattage	System Efficacy	Color Temp	CRI	Life Time	T-Case Life	Degree
	Lm	W	Lm/W	K	Ra	hrs	°C	°
Fortimo HB G2 10KLM	10.000	73	135	4000 / 5700 / 6500	80	50.000	85	60 , 90
Fortimo HB G2 15KLM	15.000	100	137	4000 / 5700 / 6500	80	50.000	85	60 , 90
Fortimo HB G2 20KLM	20.700	140	135	4000 / 5700 / 6500	80	50.000	85	60 , 90
Fortimo HB G2 25KLM	25.400	173	134	4000 / 5700 / 6500	80	50.000	85	60 , 90

Dimension (mm)



Type	Light Output	System Wattage	System Efficacy	Color Temp	CRI	Life Time	T-Case Life	Degree
	Lm	W	Lm/W	K	Ra	hrs	°C	°
Fortimo HB HE G2 10KLM	10.300	66	155	4000 / 5700 / 6500	80	50.000	85	60 , 90 , 150
Fortimo HB HE G2 15KLM	15.400	99	155	4000 / 5700 / 6500	80	50.000	85	60 , 90 , 150
Fortimo HB HE G2 20KLM	20.900	130	160	4000 / 5700 / 6500	80	50.000	85	60 , 90 , 150
Fortimo HB HE G2 25KLM	24.800	165	149	4000 / 5700 / 6500	80	50.000	85	60 , 90 , 150


LED High Bay *SMJQ - 8*



Round

Octagonal

Dimension (mm)

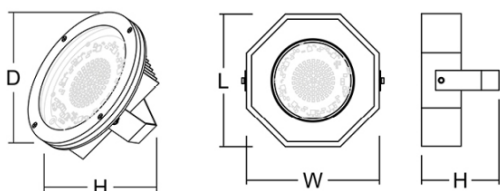

Product Specification

Lamp : Integrated AC LED Solution Acrich3 SMJQ
 Housing : 3 layers of Aluminium (Round)
 Mild Steel Sheet (Octagonal)
 Finishing : Powder Coating
 Cover : High Quality Acrylic
 Ingress Protection : IP 20

Type	W	L	H	D
Round	-	-	110.8	200
Octagonal	234.4	234.4	137	-

Equipment

Type	Light Output	Lamp Wattage	Module Efficacy	Replaced Wattage	Color Temp	CRI	Lfe Time	T-case	Driver
	lm	W	lm/W	W	K	Ra	hrs	°C	
HB - 8 - ACRICH - 95W	9.500 - 10.300	95	110	150	3700-6000	70	50.000	30-85	Integrated
HB - 8 - ACRICH - 105W	10.500 - 11.500	105	110	200	3700-6000	70	50.000	30-85	Integrated